


DOUBLE DISHDRAWER™ DIMENSIONS

DD24DDFX7, DD24DI7, DD24DCX7, DD24DCB7, DD24DCW7

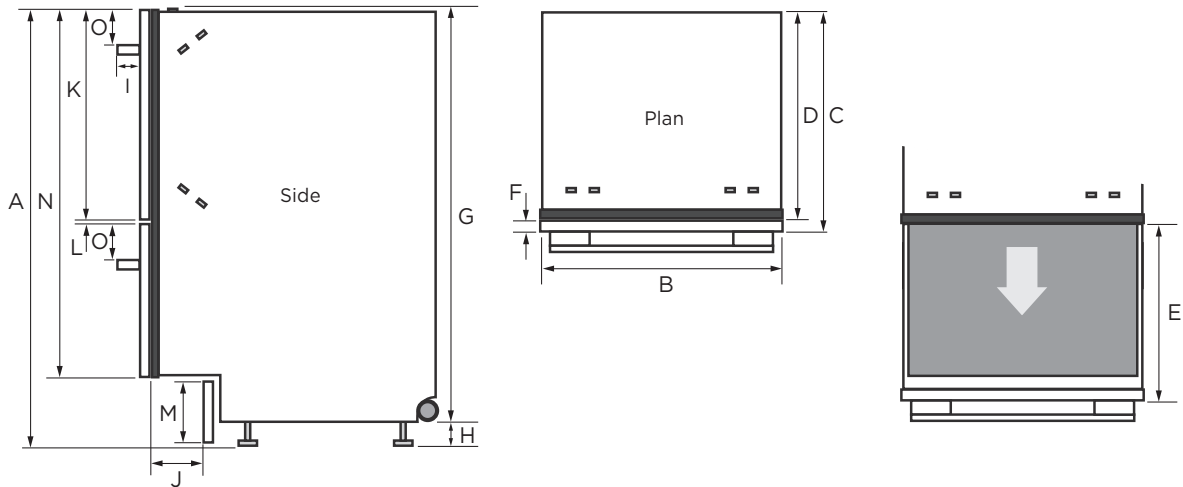

DIMENSIONS INCHES (MM)

	DD24DDFX7	DD24DI7	DD24DCX7	DD24DCB7, DD24DCW7
	Designer	Integrated Designer	Classic	Black Classic, White Classic
A overall height ¹ of product	32 5/16" - 34 5/8" (820-880) ²	32 5/16" - 34 5/8" (820-880) ²	32 5/16" - 34 5/8" (820-880) ²	32 5/16" - 34 5/8" (820-880) ²
B overall width of product	23 3/16" (599)	23 3/16" (599)	23 3/16" (599)	23 3/16" (599)
C overall depth of product (excl. handle)	22 1/2" (571)	22 1/2" (571) ³	22 15/16" (582)	22 15/16" (582)
D depth of chassis (to back of front panel)	21 3/4" (553)	21 3/4" (553)	21 3/4" (553)	21 3/4" (553)
E maximum extension of drawer (excl. handle)	21 7/16" (545)	21 7/16" (545) ³	21 7/8" (556)	21 7/8" (556)
F depth of front panel (excl. handle)	1 1/16" (18)	5/8" - 1 3/16" (16-20)	1 1/8" (29)	1 1/8" (29)
G height ¹ of chassis	31 15/16" (811)	31 15/16" (811)	31 15/16" (811)	31 15/16" (811)
H height of levelling feet	3/8" - 2 1/16" (9-69) ²	3/8" - 2 1/16" (9-69) ²	3/8" - 2 1/16" (9-69) ²	3/8" - 2 1/16" (9-69) ²
I depth of handle	1 5/8" (41)	n/a n/a	n/a n/a	n/a n/a
J depth of toekick recess (to back of front panel) ⁴	1 3/16" - 3 3/8" (30-92)	1 3/16" - 3 3/8" (30-84) ⁵	1 3/16" - 3 3/8" (30-92)	1 3/16" - 3 3/8" (30-92)
K height of upper front panel	15 1/16" (398)	min. 15 1/16" (398)	15 1/2" (394)	15 1/2" (394)
L ventilation gap between front panels	5/16" (8)	min. 5/16" (8)	3/16" (5)	3/16" (5)
M height of toekick panel (adjustable)	2 3/4" - 4 3/4" (70-120)	2 3/4" - 4 3/4" (70-120)	2 3/4" - 4 3/4" (70-120)	2 3/4" - 4 3/4" (70-120)
N height of drawer fronts	30" (762)	min. 28 1/4" (717)	29 15/16" (757)	29 15/16" (757)
O height from top of handle to top of front panel	2 1/2" (64)	n/a n/a	n/a n/a	n/a n/a

¹includes 1/16" (2mm) high bracket slots ²depending on adjustment of leveling feet ³assuming front panel thickness of 1 1/16" (18mm) ⁴adjustable to match toekick recess on adjoining cabinetry

⁵assuming that toekick mounting bracket is used with a 1 1/16" (18mm) thick custom panel; if recess is between 1 15/16" - 3 3/16" (50 and 84 mm) deep, the panel will need to be cut out - see step 'Custom panel calculations'


Product dimensions and specifications are listed as a guide only. For complete installation instructions and specifications, refer to the product Use & Care Guide/Installation Instructions available at www.fisherpaykel.com

Fisher & Paykel

fisherpaykel.com
1.888.9s:6.7872

DOUBLE DISHDRAWER™ CABINETS DIMENSIONS

DD24DDFX7, DD24DI7, DD24DCX7, DD24DCB7, DD24DCW7

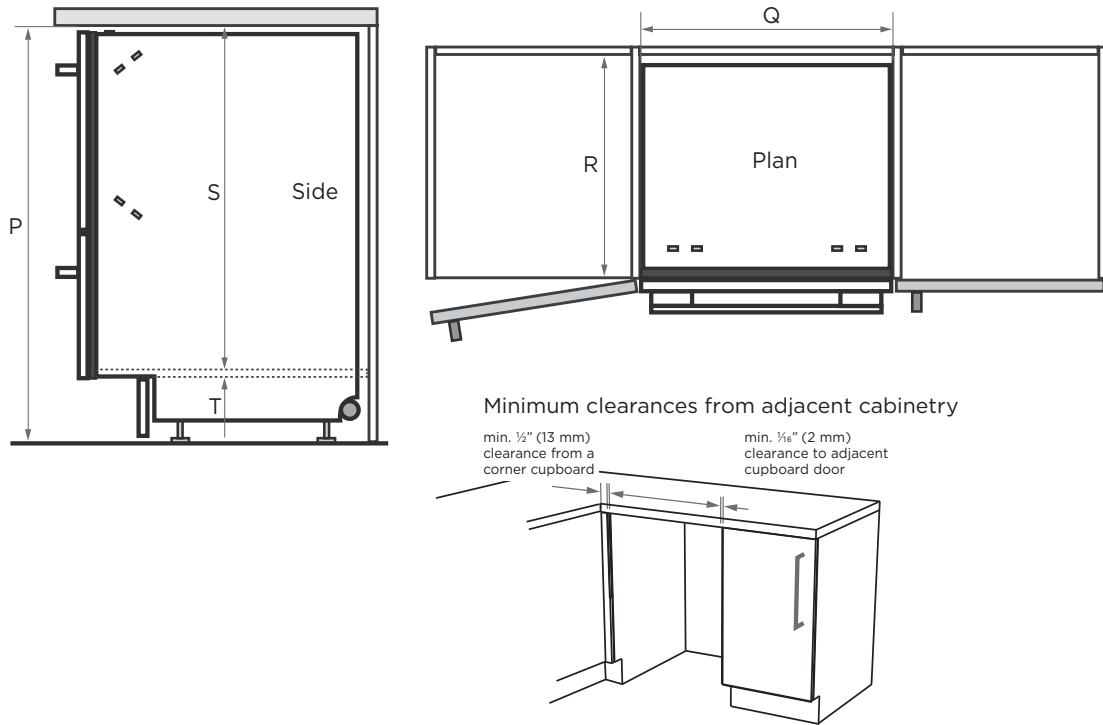

DIMENSIONS INCHES (MM)

	DD24DDFX7	DD24DI7	DD24DCX7	DD24DCB7, DD24DCW7
	Designer	Integrated	Classic	Black Classic, White Classic
P inside height of cavity*	min. 32 5/16" (820)	min. 32 5/16" (820)	min. 32 5/16" (820)	min. 32 5/16" (820)
Q inside width of cavity	23 5/8" (600)	23 5/8" (600)	23 5/8" (600)	23 5/8" (600)
R inside depth of cavity	min. 22 1/16" (560)	min. 22 1/16" (560)	min. 22 1/16" (560)	min. 22 1/16" (560)
S recommended height of adjacent cabinet space	30" (762)	min. 28 3/8" (720)	30" (762)	30" (762)
T height of toekick space*	2 3/8" - 4 3/4" (60-120)	3 1/16" - 6 3/16" (100-160)	2 3/8" - 4 3/4" (60-120)	2 3/8" - 4 3/4" (60-120)

*depending on adjustment of leveling feet

Product dimensions and specifications are listed as a guide only. For complete installation instructions and specifications, refer to the product Use & Care Guide/Installation Instructions available at www.fisherpaykel.com

Fisher & Paykel

fisherpaykel.com
1.888.9s.6.7872