


Product Specifications

| | | |
|--|-------------------------|---------------------|
| Style Number | VV024 | |
| Construction | Waterproof Foamed Core | |
| Edge Profile | Micro Bevel | |
| Nominal Dimensions | 7" wide, 48" long | |
| | US Units | Metric Units |
| Actual Product Width | 7.13" | 18 cm |
| Actual Product Length | 48.03" | 122 cm |
| Wear Layer Thickness | 20 mil (0.02") | 0.5 mm |
| Overall Product Thickness | 0.314" | 8 mm |
| Core Thickness | 0.256" | 6.5 mm |
| Attached Underlayment | Attached Cork | |
| Attached Underlayment Thickness | 0.059" | 1.5 mm |
| Finish | UV Acrylic | |
| Installation Methods | Floating or Direct Glue | |
| Profile | Angle/Tap | |
| Country of Origin | Imported | |

Packaging

| | | |
|-------------------------|-------------|-----------|
| Area per Box | 38.03 sq ft | 3.53 sq m |
| Pieces per Box | 16 pcs | |
| Weight per Box | 63.05 lbs | 28.59 kg |
| Boxes per Pallet | 35 boxes | |

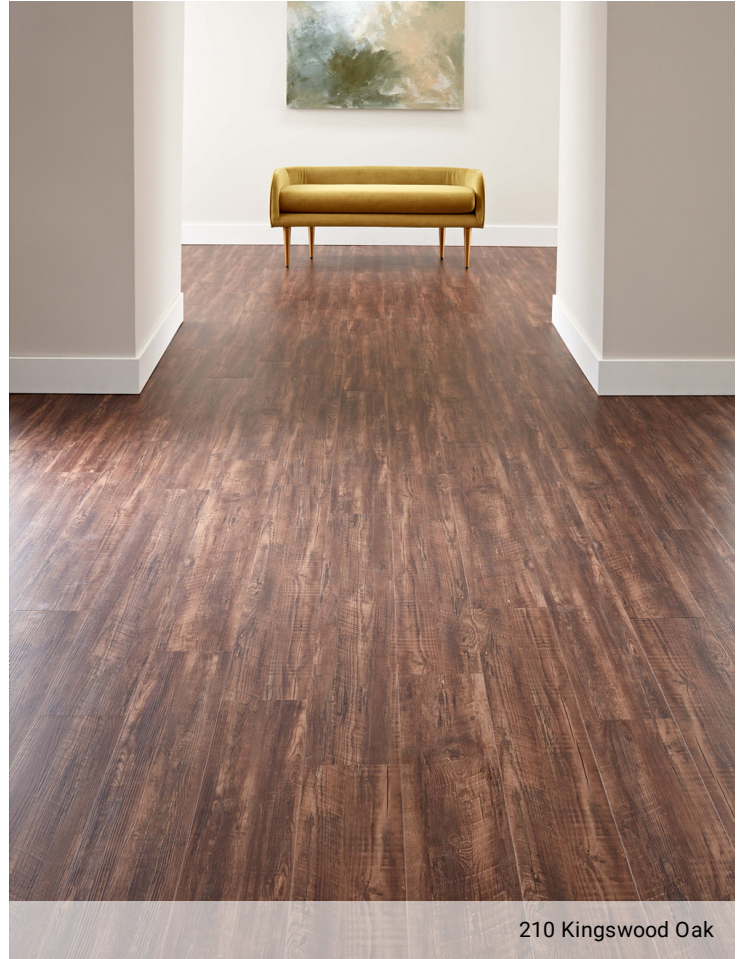

210 Kingswood Oak

Colors



COREtec Originals Classics VV024



Color Variation: V2 - Slight



Performance

| | |
|--|-------------------------------|
| Static Load (ASTM F970) | Passes |
| Residual Indentation (ASTM F1914) | Passes |
| Resistance to Heat (ASTM F1514) | Passes |
| Resistance to Light (ASTM F1515) | Passes |
| Resistance to Chemicals (ASTM F925) | Passes |
| Radiant Panel (ASTM E648) | Passes, Class I |
| Slip Resistance (ASTM D2047) | ADA compliant |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- USF Lifetime
- [Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)
- 10 Year Light Commercial
- Com Ub Bond 4100/4151


Certifications

- FloorScore Certified
- GreenGuard (Certification, Gold, Private Label) Certified




COREtec Originals Classics VV024

Coordinating Trim




Baby Threshold*

BT7CT | 94"
01V02 | 94"
01V06 | 94"




T-Molding*

TM7CT | 94"
02V24 | 94"
02V28 | 94"




Quarter Round

QTRCT | 94"
01V27 | 94"
01V31 | 94"




Overlap Stairnose*

01V76 | 94"
01V80 | 94"



Flush Stairnose

FS7HU | 94"
02V01 | 94"
02V06 | 94"

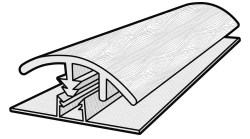

Overlap Reducer

01V52 | 94"
01V56 | 94"

*Packaged with molding track

Coordinating Metal Trim



Reducer

USC20
USC21
USC25



T-Mold

USC23
USC24



Stair Cap

USC17
USC18

Finish

Satin Silver
Satin Nickel
Dark Bronze

Installation Range

| Profile Size | Installation Range |
|--------------|------------------------|
| 3.5mm | 1.5mm to 3.5mm heights |
| 5.5mm | 3.6mm to 5.5mm heights |
| 8mm | 6mm to 8mm heights |

Stair Tread



Stair Tread

03Z70 | 48"