

COREtec Pro Premium VV800

Product Specifications

Style Number VV800

Construction Solid Polymer Core


Edge Profile Enhanced Integrated Bevel

Nominal Dimensions 7" wide, 48" long

	US Units	Metric Units
Actual Product Width	7.13"	18 cm
Actual Product Length	49"	124 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.236"	6 mm
Core Thickness	0.197"	5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment	0.039"	1 mm
Thickness		
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	
Packaging		

Area per Box	16.97 sq ft	1.57 sq m
Pieces per Box	7 pcs	
Weight per Box	36.2 lbs	16.42 kg

Boxes per Pallet 70 boxes

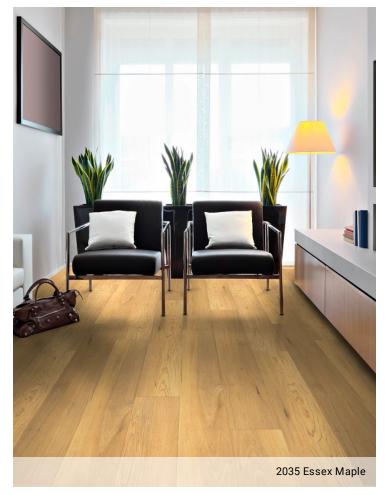

Colors



COREtec Pro Premium VV800



Performance

Static Load (ASTM F970)PassesResidual Indentation (ASTM F1914)PassesResistance to Heat (ASTM F1514)PassesResistance to Light (ASTM F1515)PassesResistance to Chemicals (ASTM F925)Passes

Radiant Panel (ASTM E648) Passes, Class I
Slip Resistance (ASTM D2047) ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof

15 Year Light Commercial

Coordinating Trim



Baby Threshold*
BT7CT | 94"



T-Molding*
TM7CT | 94"



Quarter Round
QTRCT | 94"



Flush Stairnose FS5CT | 94"

*Packaged with molding track

Coordinating Metal Trim



Finish T-Mold
Satin Silver USC23
Satin Nickel USC24
Dark Bronze USC25

Stair Cap

USC17 USC18

Installation Range

Profile Size	Installation Range
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

COREtec Pro Premium VV800



Stair Tread

Stair Tread 03Z70 | 48"