



Indoor Delight

SPC COLLECTION



LI-ID14 Homewood Waltz

Indoor Delight offers sophisticated European oak designs using the latest EIR embossing technology, 10 plank repeats, and on-trend 6' x 9" planks, delivering a premium, rich and vivid look. Its exclusive designs are unique to Lions Floor, ensuring truly "limited edition" flooring projects that protect consumers from competitors. Indoor Delight is also antibacterial-cured, easy to install, low-maintenance, environmentally friendly, and durable, making it appeal to both homeowners looking for an upgrade on their remodel, as well as builders in mid to high-end new construction.



Waterproof



Indent Resistant



Sound Tested



Pet Friendly



Formaldehyde Free



Phthalate Free

SPECIFICATIONS

Material Type	SPC	Pad Type	Antibacterial + Acoustic	Per Box	5 pieces	22.65 sq.ft.	50 lbs.
Plank Size	6' x 9"	Edge Profile	Painted Bevel	Pallet	40 boxes	906.1 sq.ft.	2,050 lbs.
Total Thickness	6.5 mm	Installation Type	Floating	Container	960 boxes	21,746 sq.ft.	
Core Thickness	5 mm	Click System	Uniclic				
Wear Layer	20 mil	Plank Repeat	10				
Attached Pad	Yes	Texture/Style	Embossed in Register				
Pad Thickness	1.5 mm	Finish	UV Acrylic				



CERTIFIED BY SCS Global Services

Indoor Delight



COLORS



LI-ID01 Country Breeze



LI-ID02 Castle Forge



LI-ID03 Slate Ballad




LI-ID04 Pearl Abyss



LI-ID05 Ashen Land



LI-ID06 Fortress Dawn

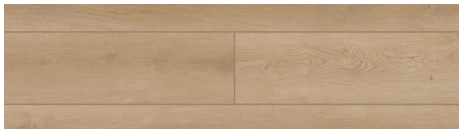

LI-ID07 Forest Timber



LI-ID08 Peacock Flush



LI-ID09 Lotus Clove



LI-ID10 Farmstead



LI-ID11 Tannin Honey



LI-ID12 Shoreline Décor



LI-ID13 Woodland Charm



LI-ID14 Homewood Waltz

MOULDINGS



End Cap



Flush Stair Nose



Quarter Round



Reducer



Stair Tread



T-Moulding

TESTING

ASTM E648	Fire Rating	Class 1	ASTM F410	Average Wear Layer Thickness	23.3 mil
ASTM D2047	Coefficient of Friction	Standard Neolite 1.02	ASTM F2199	Dimensional Stability, Curl After Heat	Passes
ASTM F970	Static Load Limit	0.008 in.	ASTM F1914	ASTM F2199	Passes
E492	IIC - Impact Sound Rating	61 db	ASTM F1514	Resistance to Heat	Passes
E90	STC - Sound Transmission Loss	53 db	ASTM F1514	Resistance to Light	Passes
ASTM F387	Overall Thickness	0.264 in.	Phthalate Free		Floor Score Certified