

Product Specifications

Style Number	VV968	
Construction	Solid Polymer Core	
Edge Profile	Enhanced Painted Bevel	
Nominal Dimensions	9" wide, 72" long	
	US Units	Metric Units

Actual Product Width	9.06"	23 cm
Actual Product Length	72.83"	185 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.255"	6.5 mm
Core Thickness	0.209"	5.3 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.047"	1.2 mm
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	


Packaging

Area per Box	27.48 sq ft	2.55 sq m
Pieces per Box	6 pcs	
Weight per Box	63.27 lbs	28.69 kg
Boxes per Pallet	44 boxes	



1030 Rushden Walnut

Colors

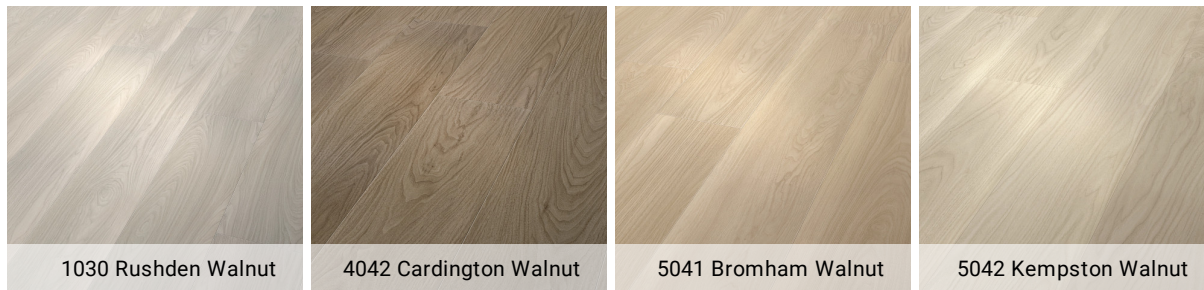

Performance

Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

COREtec Pro Premium VV968

Warranties

USF Lifetime


USF 15 Year Heavy Commercial

Coordinating Trim




Baby Threshold*

BT7CT | 94"




T-Molding*

TM7CT | 94"



Quarter Round

QTRCT | 94"



Flush Stairnose

FS5CT | 94"

*Packaged with molding track

Coordinating Metal Trim



Reducer

USC20

USC21

USC25



T-Mold

USC23

USC24



Stair Cap

USC17

USC18

Finish

Satin Silver

Satin Nickel

Dark Bronze

Installation Range

Profile Size	Installation Range
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

Stair Tread



Stair Tread

03Z70 | 48"