



DESIGN AND APPEARANCE

- Coordinates with both Viking Professional and Viking cooktops and Viking Professional rangetops
- Compact design is installed directly behind a cooktop or rangetop for an unobtrusive appearance
- Available in 30", 36", 45" and 48" widths
- Thin profile provides additional space under the cabinet

PROFESSIONAL PERFORMANCE AND FEATURES

- Industry leading 18" high chimney rise is ideal for large pots and pans, capturing more smoke and odors than other downdrafts
- Brushed stainless steel cover with dishwasher-safe filters are easy to remove for cleaning
- Filter clean indicator takes the guesswork out of when to clean the filter
- Capacitive touch control on front and top
- Two level LED lighting (500 LUX) for bright surface illumination
- Four speed blower efficiently handles all types of cooking
- Heat sensor automatically adjusts speed of blower to high when excessive heat is detected

MODEL NUMBERS

- ■VDD5300SS 30"W. Rear Downdraft
- ■VDD5360SS 36"W. Rear Downdraft
- ■VDD5450SS 45"W. Rear Downdraft
- VDD5480SS 48"W. Rear Downdraft



BLOWER OPTIONS

- VDVI600 600 CFM interior flex blower
 - Unique ducting capability allows interior blower to be ducted left, right, down or as a remote mount
- VDVE900 900 CFM external blower
- VDVE1200 1200 CFM external blower
 - Optional ARKD accessory recirculating kit provides an option when outside ducting is not possible

ACCESSORIES

- ARKD Non-duct recirculation kit
- BPFD Non-duct filter replacement
- ATKD8 Transition to 8" round
- ATKD10 Transition to 10" round
- RCVD8 Front panel rough-in for remote flex blower 8"
- RCVD10 Front panel rough-in for remote flex blower 10"
- ■VACE36 End caps for 36-3/4"W. cooktop

- AXKD2 2' of flexible duct
- AXD5 5′ of extension cable for flex blower remote use
- FSVDD30SS Filler strip for 30" VEC/VIC cooktop
- FSVDD36SS Filler strip for 36" VEC/VIC cooktop
- ■FSVRVDD30SS Filler strip for 30" range/rangetop
- FSVRVDD36SS Filler strip for 36" range/rangetop
- FSVRVDD48SS Filler strip for 48" range/rangetop

COLOR FINISHES

Available in Stainless Steel (SS)

WARRANTY


- 1-year full covers complete unit
- 5-year limited covers downdraft blower



BUILT-IN REAR DOWNDRAFTS

BUILT-IN REAR DOWNDRAFTS						
MODEL NUMBER	CFM	RECOMMENDED DUCT SIZE	MAX DUCT RUN	120 V/60 HZ MAX AMPS		
VDVI600 (interior) – NEW	600	8" round	40 feet (12.2m)	3.0		
VDVE900 (exterior) – NEW	900	10" round	50 feet (15.2m)	5.7		
VDVE1200 (exterior) – NEW	1200	10" round	50 feet (15.2m)	6.0		

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

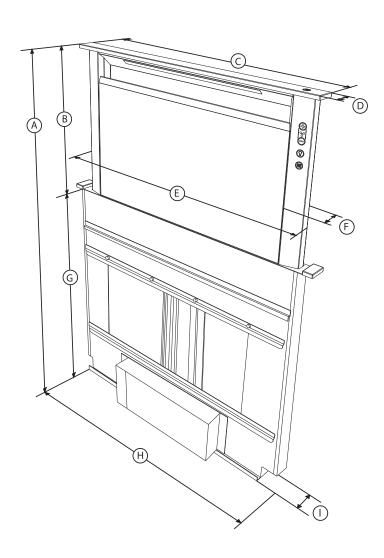

	30"W. Model	36"W. Model	45"W. Model	48"W. Model
Α	47.875"	47.875"	47.875"	47.875"
В	18.5"	18.5"	18.5"	18.5"
С	27.375"	33.375"	43.375"	45.375"
D	2.25"	2.25"	2.25"	2.25"
Е	25.5"	31.5"	40.5"	43.5"
F	1.75"	1.75"	1.75"	1.75"
G	29.375"	29.375"	29.375"	29.375"
Н	27.125"	33.125"	42.125"	45.125"
ī	2.5"	2.5"	2.5"	2.5"



VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com © 2015 Viking Range, LLC All rights reserved. Specifications subject to change without notice.

F60343 0516