

Product Specifications

Style Number	VV855
Construction	Waterproof Foamed Core
Edge Profile	Enhanced Painted Bevel
Nominal Dimensions	7" wide, 60" long

	US Units	Metric Units
Actual Product Width	7.13"	18 cm
Actual Product Length	60"	152 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.472"	12 mm
Core Thickness	0.354"	9 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.118"	3 mm
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	


Packaging

Area per Box	20.78 sq ft	1.93 sq m
Pieces per Box	7 pcs	
Weight per Box	46.5 lbs	21.09 kg
Boxes per Pallet	50 boxes	



4056 Wilson Pecan

Colors

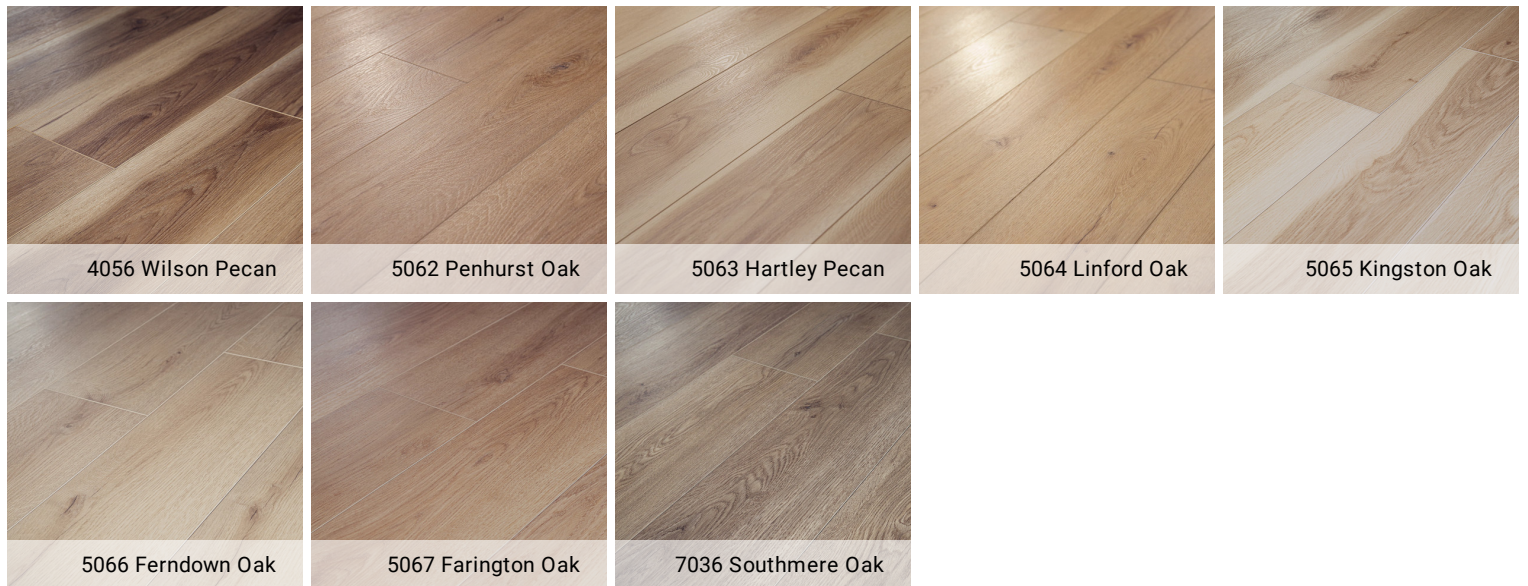

Coretec Originals Enhanced VV855


Warranties

USF Lifetime

Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof


USF 10 Year Medium Commercial

Coordinating Trim




Baby Threshold*

B10CT | 94"




T-Molding*

T10CT | 94"



Quarter Round

QTRCT | 94"



Flush Stairnose

F12HU | 94"

*Packaged with molding track

Stair Tread



Stair Tread

03Z70 | 48"