


Download the soundcore app to experience adaptive noise cancelling, ambient sound modes, HearID sound, gaming mode, movie mode, firmware update, and more exciting features.


If your earbuds cannot connect with the soundcore app, re-install the app or update it to the latest version in your mobile app store. Click this link to download: http://dl-soundcore.soundcore.com/qcdl?flow=soundcore

OVERVIEW



- 1. Touch Control Area
- 2. Charging Contactors
- 3. Reset Button
- 4. USB-C Charging Port
- 5. LED Light Strip
- 6. Phone Stand


WEARING



Choose the ear tips that fit your ears best and take a fit test in the soundcore app to ensure you get the best ANC performance.

*Dust, earwax or other debris can accumulate in the earbuds. To maintain optimal sound quality, regularly clean your earbuds via using a cotton swab slightly moistened with rubbing alcohol to gently wipe the metal mesh filter under the rubber ear tips.

POWERING ON & PAIRING

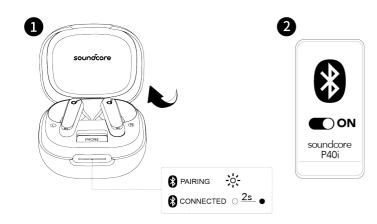


Open the charging case, the earbuds will automatically power on and enter Bluetooth pairing mode. Select "soundcore P40i" from your device's Bluetooth

Isst when connecting for the first time.When pairing, the LED light strip will start flashing white slowly. After the pairing is successful, the LED light strip will stay on for 2 seconds and then go off.

*When taken out, the earbuds will automatically power off after 30 minutes if they are not connected. The duration can be set in the soundcore app.

CHARGING

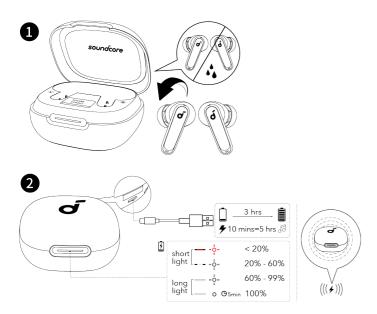



1. Place the earbuds in the charging case and close it.

• Fully dry off the earbuds and the USB-C charging port before charging.

2. Connect the charging case to a power supply by using a certified USB-C charging cable. Alternatively, position the charging case at the center of your wireless charger for wireless charging.

DUAL CONNECTIONS

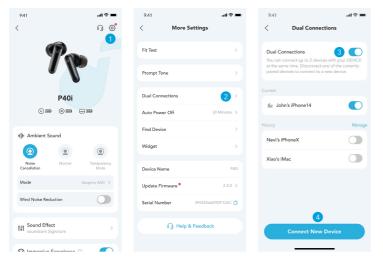

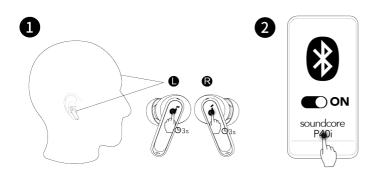

To connect earbuds with two Bluetooth devices at the same time, there are two methods:


Method 1: Using the soundcore App

In the soundcore app, tap on the **Settings** icon located at the upper right corner of the app's interface. Then select **Dual Connections > Enable Dual Connections > Connect New Device**.

Method 2: Manual Pairing with the Second Device


While wearing the earbuds, press and hold the touch control area on both earbuds for 3 seconds until you hear a voice prompt of entering pairing mode. Then you can proceed to pair with the second device.

MANUAL PAIRING

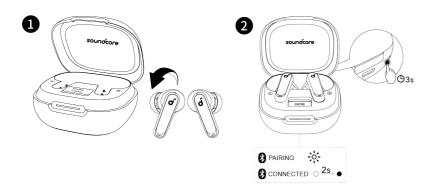

To manually enter Bluetooth pairing mode, place the earbuds in the charging case and leave the case open. Press and hold the reset button behind the charging case for 3 seconds until the LED light strip flashes white rapidly.

CONTROLS



×1: Tap once ×2: Tap twice 2s: Tap and hold for 2 seconds You can also customize controls in the soundcore app.


AMBIENT SOUND



You can select noise cancellation, normal, or transparency mode in the soundcore app.


- Adaptive ANC: Optimize noise cancellation by adapting to the surrounding environment.
- Transparency: Stay aware of your surroundings while listening to music.

POWERING OFF

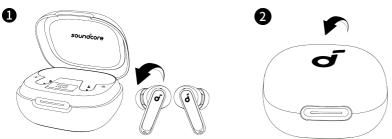


To power off, return the earbuds to the charging case and close it.

RESET

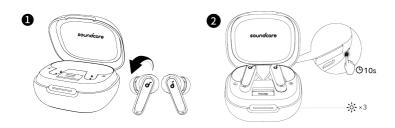

Place the earbuds in the charging case and leave the case open. Press and hold the reset button behind the charging case for 10 seconds until the LED light strip flashes white rapidly three times.

LED LIGHT GUIDE

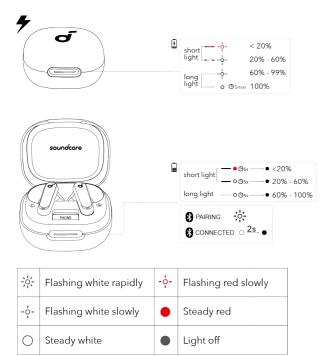

FIRMWARE UPDATE

| 9:41 | e lin | - | 9:41 | |
|------------------------------|------------------|-----|-----------|--|
| More | Settings | | < | Update Firmware |
| t Test | | > | Pa | Version: 2.3.0 |
| ompt Tone | | > | . 4 | Size: 1.3M |
| | | | What's l | New: |
| ual Connections | | > | | nware update you will get the additions and these issues will |
| uto Power Off | 30 Minutes | > | addressed | |
| ind Device | | > | | |
| Vidget | | > | | |
| evice Name | Pr | 101 | | |
| lpdate Firmware [●] | 2.3.0 | > | | 2 |
| erial Number | 39524A66D92F12AC | 0 | | Download |
| | & Feedback | | | |

You will be informed once a new firmware version is detected when you connect the earbuds to the app. Ensure the earbuds are placed in the charging case and the case remains open until the firmware update is complete. During the update, ensure the earbuds are being charged and avoid any usage.

SPECS

Specifications are subject to change without notice.

| Input | 5V0.8A | |
|-----------------------------|--|--|
| Output | 5V0.34A | |
| Battery capacity | 60mAh*2 (earbuds) +800mAh (charging case) | |
| Playtime (with ANC off) | 12 hours / 60 hours | |
| Playtime (with ANC on) | 10 hours / 50 hours | |
| Charging time | Full Charging Time (charging case) for earbuds: 1 hour Full Charging Time (type C) for charging case: 3 hours | |
| Driver unit | 11 mm dynamic driver | |
| Frequency response | 20Hz - 20kHz | |
| Impedance | 14Ω | |
| Waterproof rating (earbuds) | IPX5 | |

| Bluetooth version | 5.3 |
|-------------------|-----|
| Bluetooth range | 10m |

Customer Service

 \bowtie



+91 18003138831 (India)

Regulations and Compliance Information

Hereby, Anker Innovations Limited declares that this device is in compliance with The Product Security and Telecommunications Infrastructure (Security Requirements for Relevant Connectable Products) Regulations 2023. For the Statement of Compliance, visit the website: https://uk.soundcore.com/pages/psti-related.

Note: The 'x' of SN Code: xxxxxxxxxxx is a variable, see below table.

| Variable 'x' | Range of variable | Content | |
|-----------------|-------------------|---|--|
| Seventh | 0-9 or A-F | Denotes the hardware version which is not effected on the safety compliance. | |
| Eighth | 8,9,A,B,C | Denotes the year, 8 means 2018, 9 means 2019, A means 2020, B means 2021, C means 2022, and so on. | |
| Ninth and tenth | 01,02,03 | Denotes weeks, 01 means the first week in this year, 02 means the secondary week in this year, and so on. | |
| Eleventh | 1-7 | Denotes date, 1 means Monday, 2 means Tuesday, 7 means Sunday and so on. | |
| The last five | 00001-99999 | Denotes serial No. | |